


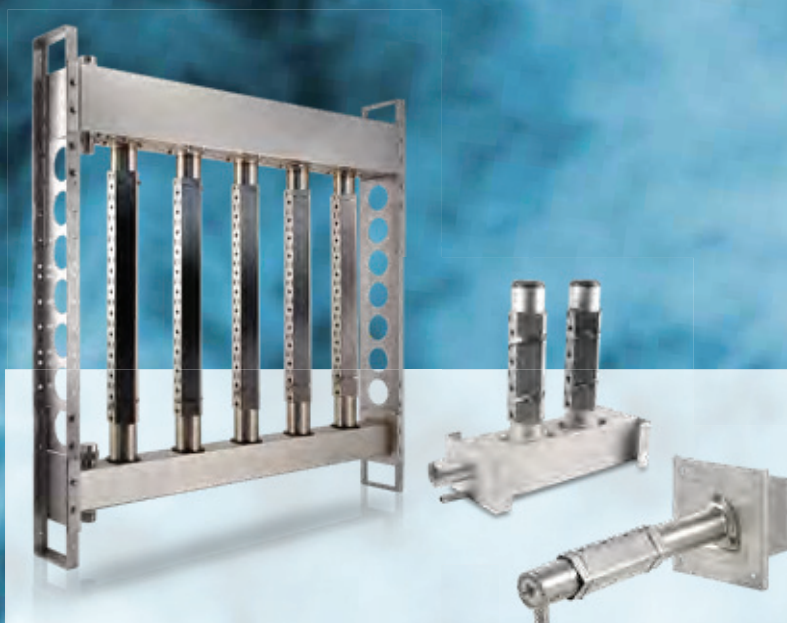

## **ultimateSAM**

High-efficiency pressurised or  
atmospheric pressure steam  
distributors

# Steam distributor for short absorption distances

Energy saving by minimising condensate formation and the amount of heat dispersed in the AHU or duct. Suitable for steam from both pressurised circuits and humidifiers.

- Fully aseptic, high precision humidification;
- minimum absorption distance (even below 0.2 m);
- suitable for steam flow-rates from 15 kg/h to 1110 kg/h and pressures from 0.01 barg to 4 barg;
- fully AISI 304 stainless steel structure.



step 76 mm

step 152 mm

step 304 mm



compact version - step 102 mm



single pipe

ultimateSAM is a steam distributor designed to take in pressurised or atmospheric pressure steam and the deliver it dry directly into the duct or air handling unit.

Single- and multi-pipe distributors ensure the best solution for every need, in terms of both uniform steam distribution and the widest possible area covered.

The minimum absorption distance and reduced condensate formation are guaranteed even with high air speeds (> 4 m/sec).

## Adaptability

ultimateSAM can be made to measure:

- multi-pipe versions from 450x600 mm to 3000x3100 mm with pipes spaced 76, 152 or 304 mm apart;
- horizontal single pipe versions with a total length from 503 mm to 2175 mm;
- ultimateSAM compact version with shorter pipes, spaced 102 mm apart for small air ducts;
- ultimateSAM version with pipes spaced 304 mm apart to optimise steam distribution in large ducts with low humidification loads;
- steam supply either from the top or the bottom.



## Energy efficiency

Maximum energy savings. Insulated models reduce air heating and condensation.



## Precision

Suitable for high-precision humidification thanks to uniform steam distribution in the AHU/duct and the valves with electrical operation for even more accurate modulation.




## Hygiene and materials

Made from AISI 304, with PPS components (Ryton with a continuous operating temperature of 220°C/428°F). The gaskets in contact with the steam are made from silicone for high temperatures (150°C/300°F max) or EPDM for those not in contact with the steam.

## Anti-condensate nozzles

To ensure a very short absorption distance and have only dry steam injected into the AHU/duct, the pipes (AISI 304 steel) are equipped with nozzles (Ryton - PPS) that take the steam from the middle of the pipe, away from the walls where condensate may form.

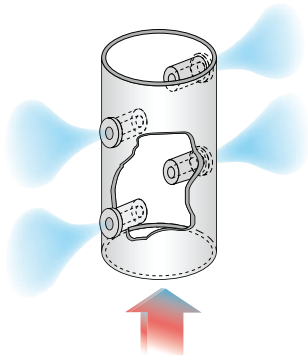


## Pipe insulation

The pipes can be ordered with air gap insulation. An AISI 304 steel structure isolates the steam pipe from direct contact with the air in the AHU/duct, reducing condensate formation by 30%.







## Condensate separator manifold for SA0\* single pipe models


In the single pipe versions, the manifold acts as a condensate separator. Thanks to the deflector, the steam is forced to follow a path in which it is separated from any condensate drained through the discharge terminal. Only dry steam therefore enters the distributor pipe.

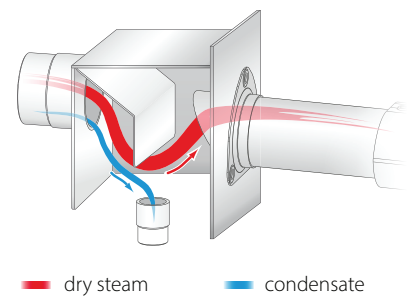

## OVERVIEW DRAWING ultimateSAM

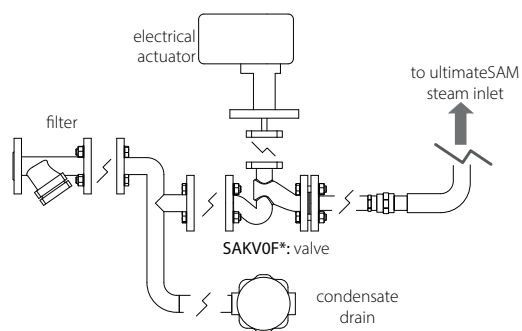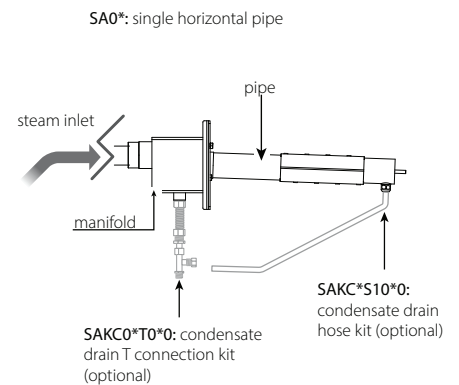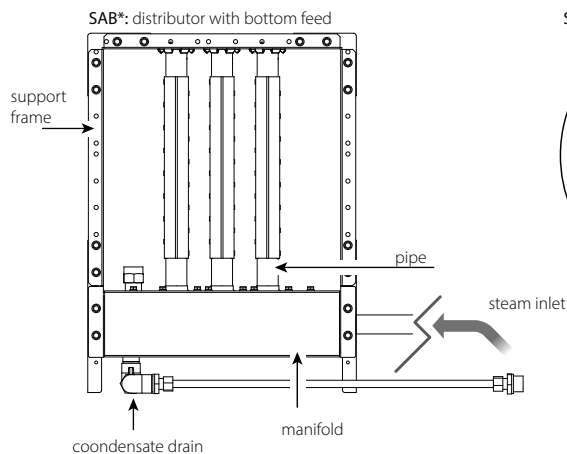


application with steam under pressure

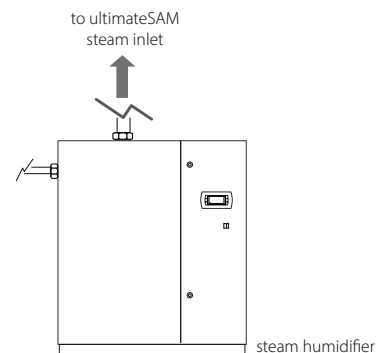

application with steam at atmospheric pressure

## Part number

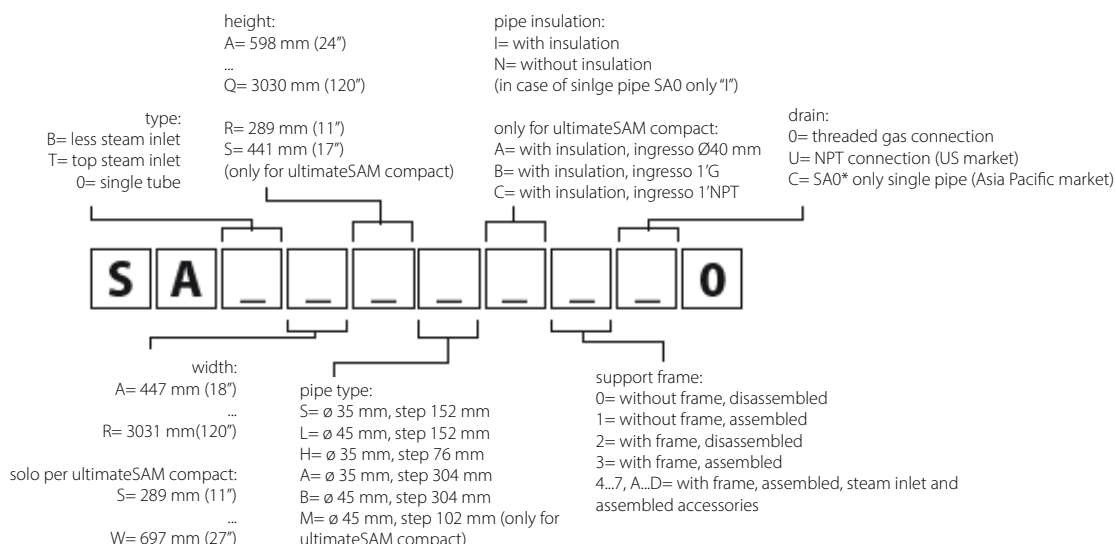

## Technical specifications

| Models | Description                                          | Maximum steam flow-rate at atmospheric pressure     | Maximum pressurised steam flow-rate                |
|--------|------------------------------------------------------|-----------------------------------------------------|----------------------------------------------------|
| SAO*   | Single-pipe version                                  | From 20 kg/h to 50 kg/h (44 lbs/h to 110 lbs/h)     | From 20 kg/h to 140 kg/h - (44 lbs/h to 308 lbs/h) |
| SAB*   | Multi-pipe version with steam supply from the bottom | From 15 kg/h to 370 kg/h (33 lbs/h to 814 lbs/h)    |                                                    |
| SAT*   | Multi-pipe version with steam supply from the top    | From 60 kg/h to 1110 kg/h (132 lbs/h to 2447 lbs/h) |                                                    |

### Headquarters

CAREL INDUSTRIES HQs  
Via dell'Industria, 11  
35020 Brugine - Padova (Italy)  
carel@carel.com



#### Arion S.r.l.

Sede operativa:  
Via Pizzo Camino, 28  
24060 Chiuduno (BG) - Italy  
www.arionsensors.com

#### HygroMatik GmbH

Lise-Meitner-Straße 3  
24558 Henstedt-Ulzburg - Germany  
www.hygromatik.com

#### RECUPERATOR

Via Valfurva 13  
20027 Rescaldina (MI) - Italy  
www.recuperator.eu

#### C.R.C. S.r.l.

Via Selva di Pescarola 12/9  
40131 Bologna - Italy  
info@crc-srl.net  
www.carel.com

#### Klingenburg GmbH

Brüsseler Str. 77  
45968 Gladbeck - Germany  
www.klingenburg.de

#### Sauber

Via Don Doride Bertoldi, 51  
46047 Porto Mantovano (MN) - Italy  
www.sauberservizi.it

### Authorised distributor



Umecto AB – del av Klimatbyrå AB  
Tel: +46 (0)10-288 92 90  
info@umecto.se | www.umecto.se  
Sverige | Sweden

#### ENGINIA S.r.l.

Viale Lombardia, 78  
20056 Trezzo Sull'Adda (MI) - Italy  
www.enginiasrl.com

#### Klingenburg International Sp. z o.o.

ul. Metalowców 5  
PL-58-100 Świdnica, Poland  
www.klingenburg.pl

#### Senva

1825 NW 167th Pl, Beaverton,  
OR 97006, Stati Uniti  
www.senvainc.com

# CAREL

To the best of CAREL INDUSTRIES S.p.A. knowledge and belief, the information contained herein is accurate and reliable as of the date of publication. However, CAREL INDUSTRIES S.p.A. does not assume any liability whatsoever for the accuracy and completeness of the information presented without guarantee or responsibility of any kind and makes no representation or warranty, either expressed or implied. A number of factors may affect the performance of any products used in conjunction with user's materials all of which must be taken into account by the user in producing or using the products. The user should not assume that all necessary data for the proper evaluation of these products are contained herein and is responsible for the appropriate, safe and legal use, processing and handling of CAREL's products. The Information provided herein does not relieve the user from the responsibility of carrying out its own tests, and the user assumes all risks and liabilities related to the use of the products and/or information contained herein. © 2025 CAREL INDUSTRIES S.p.A. All rights reserved.