KLIMATBYRÅN

FabricAir®

Suspension type – 02

Introduction

Double Cable

- Simple on straight runs
- Great for larger diameters
- Available in galvanized and stainless steel

Click or Scan

Animation

Click or Scan

Drawings

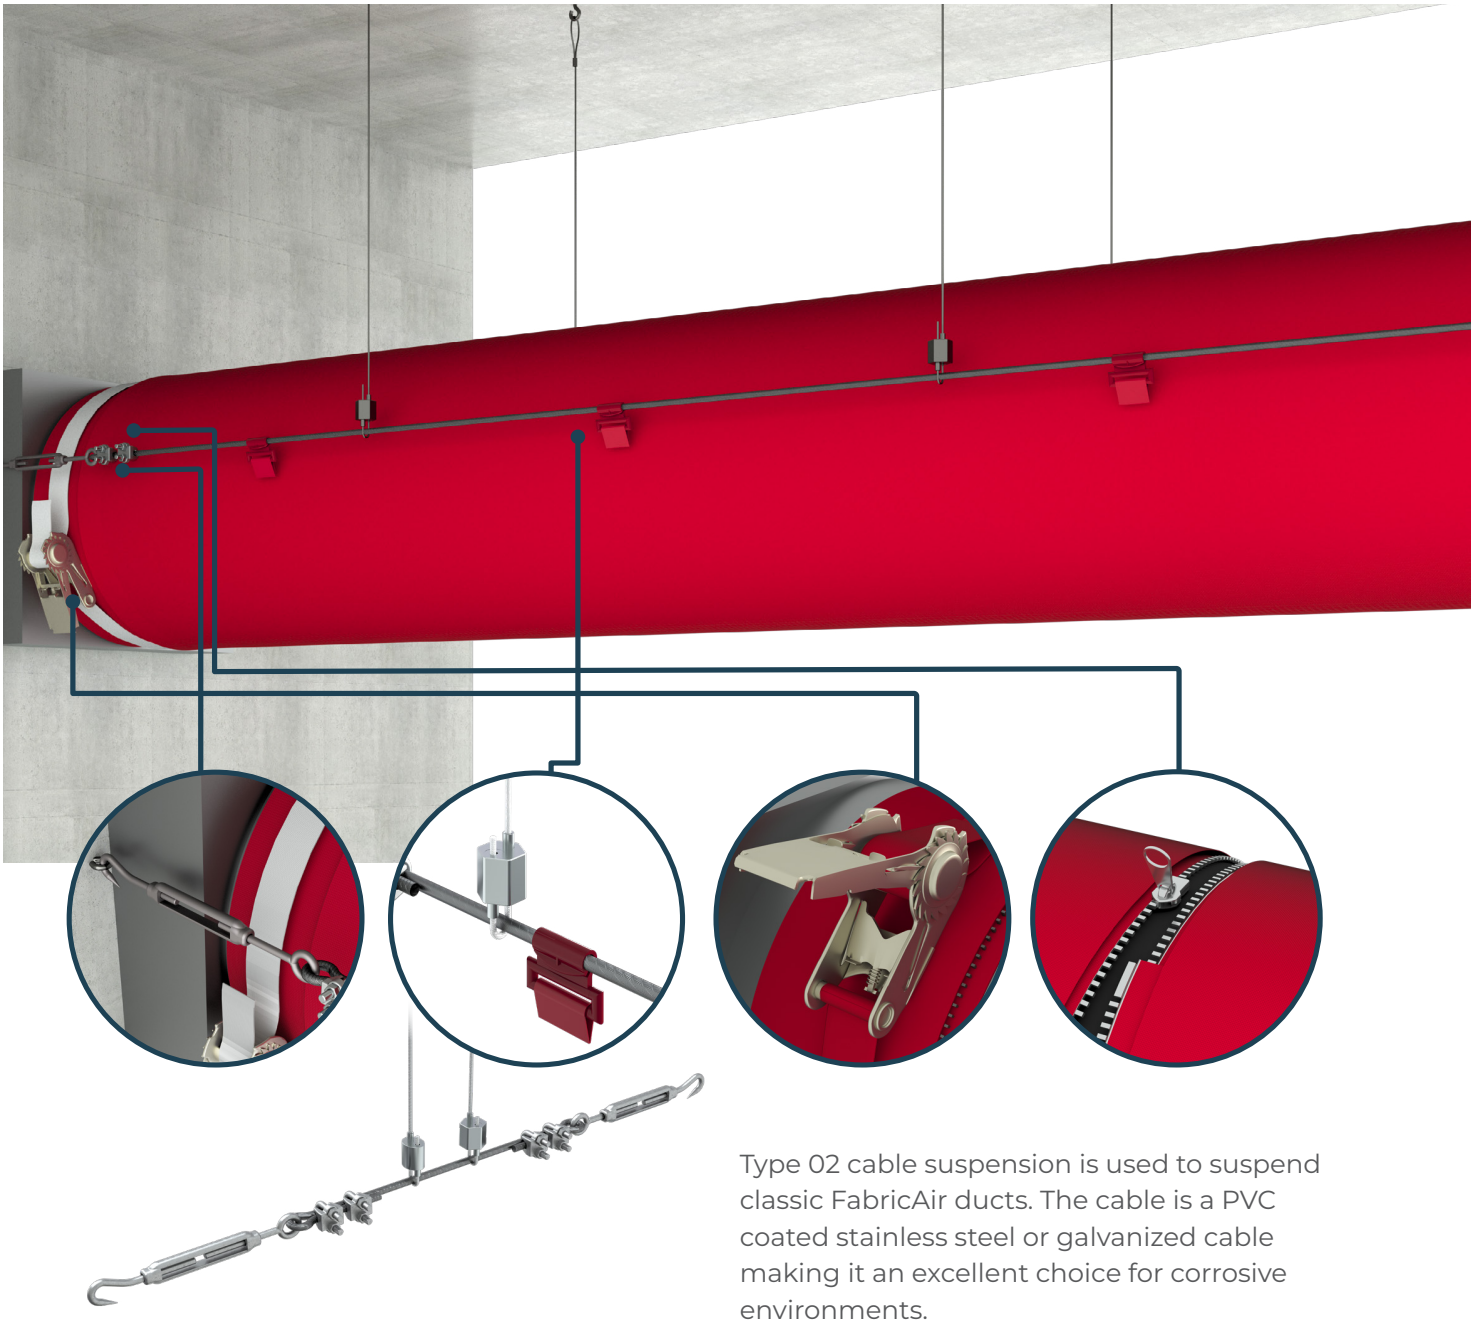

Type 02 cable suspension is used to suspend classic FabricAir ducts. The cable is a PVC coated stainless steel or galvanized cable making it an excellent choice for corrosive environments.

Example of duct system configuration

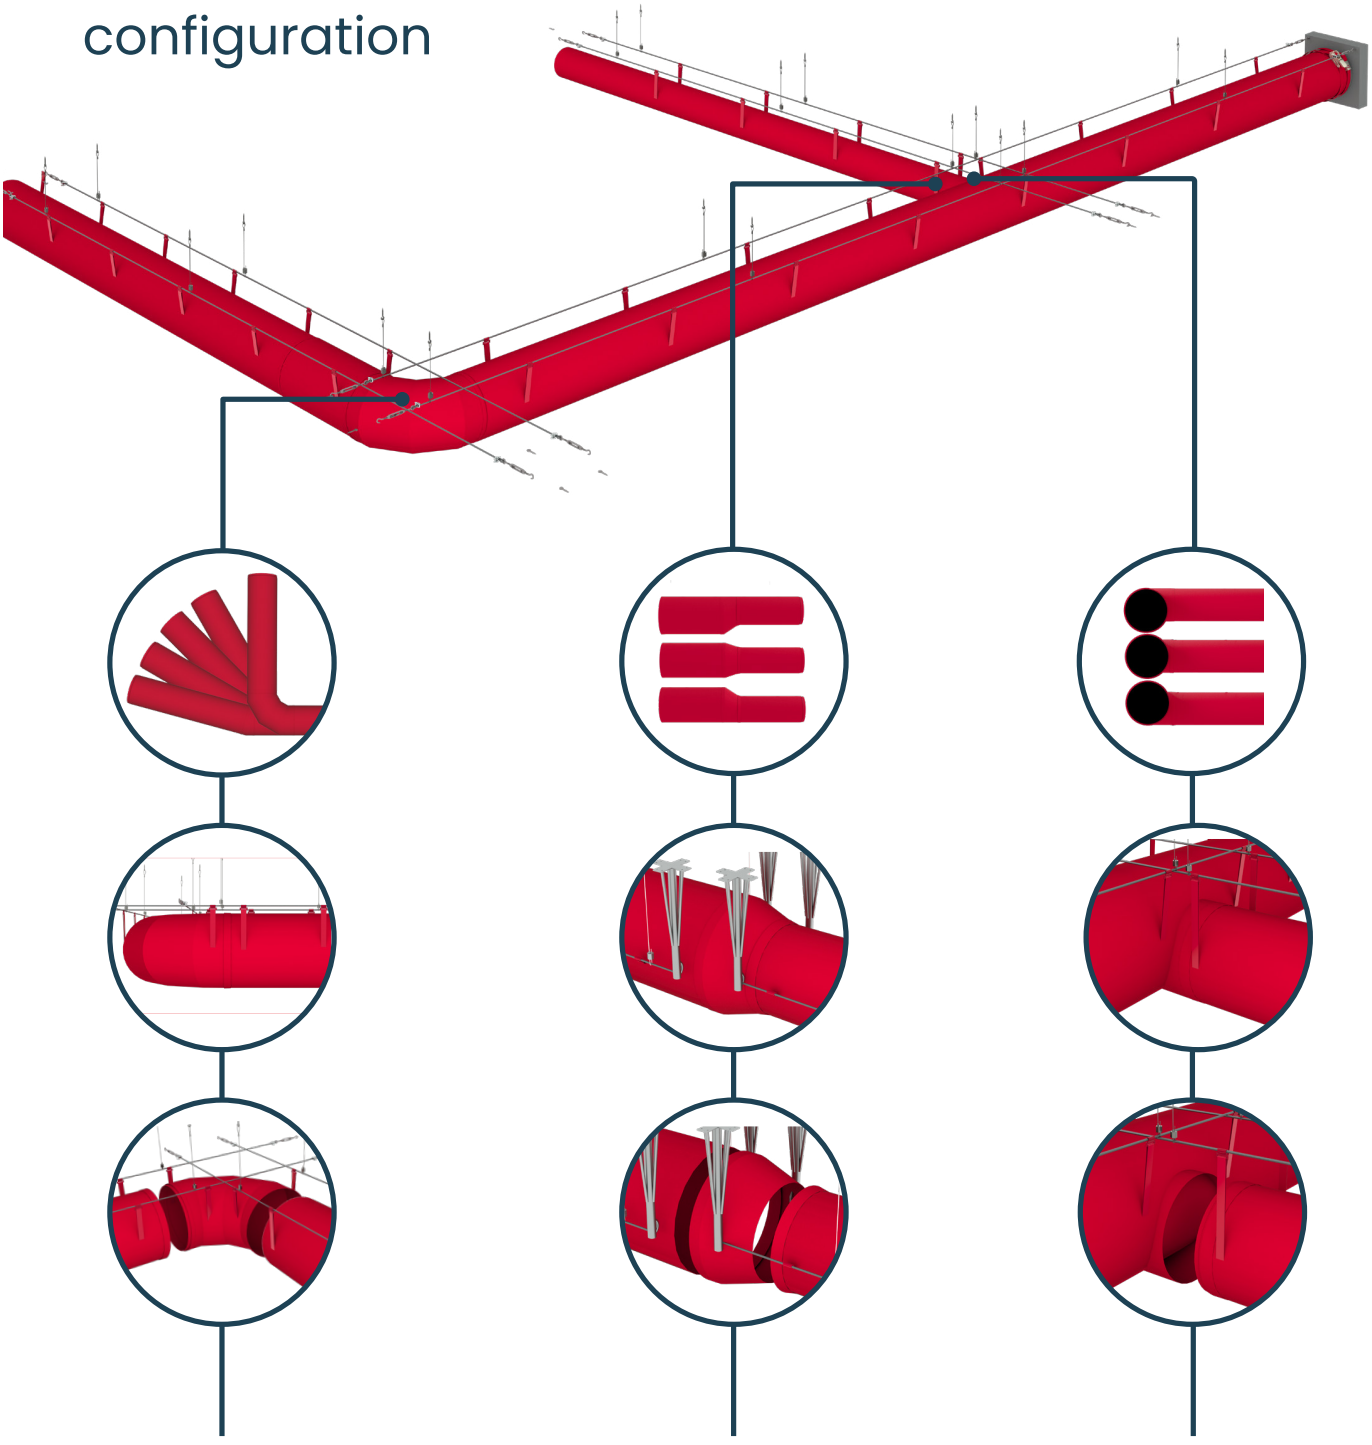

Elbows

We provide custom elbows in any degree and size. .

Reductions

Concentric and eccentric reducers are available. Top-aligned are the standard for Type 02 Cable Suspension.

Branches

Concentric and eccentric Branch take-offs are available. Top-aligned are the standard for Type 02 Cable Suspension.

Options available for type 02

Adjustable cable drop for type 02

Type 02, uses two cables that runs along the sides of the duct at the 9 and 3 o'clock positions and anchors to the building structure at either end. Adjustable Cable Drops are hung from the building structure along the length of the system and support the cable to prevent sagging.

Cable Drop

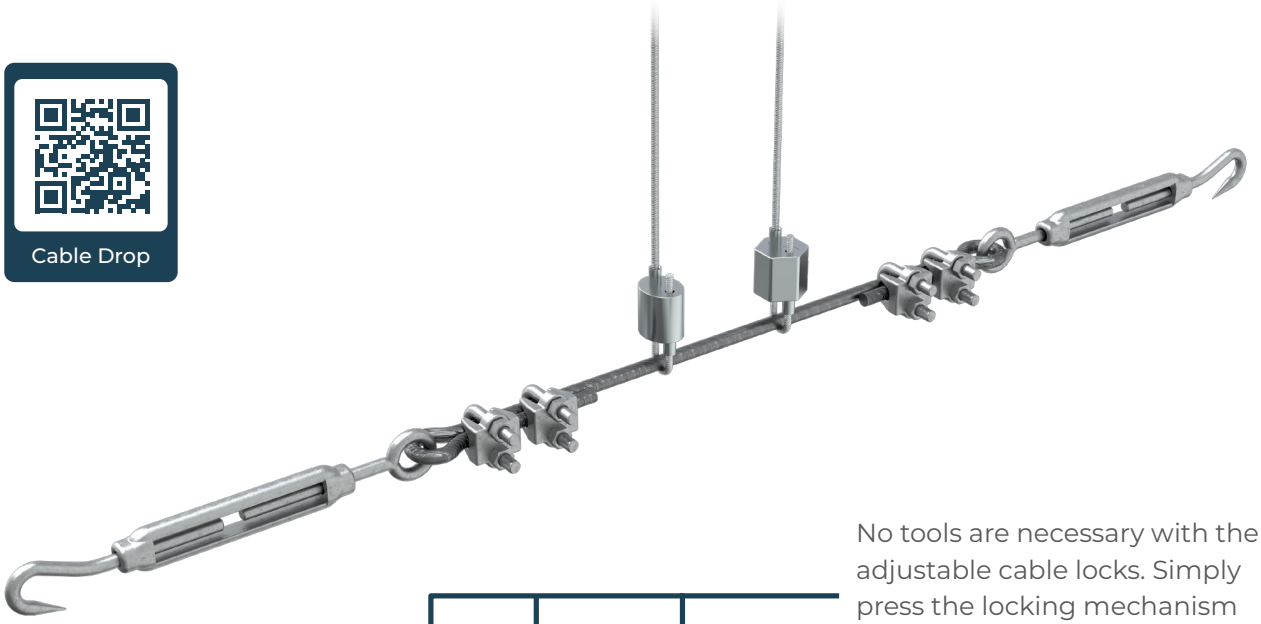

No tools are necessary with the adjustable cable locks. Simply press the locking mechanism down and adjust.

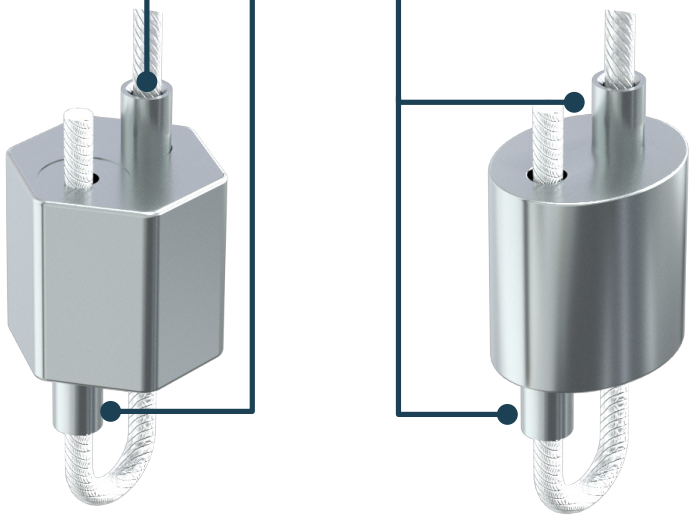

Adjustable Cable Lock for SS suspension selection

Adjustable Cable Lock for GV suspension selection

Note: There are two types of Adjustable Cables Locks for Type 02. Customer will use only one of them, based on project.

Försäljning Sverige
Klimatbyrån AB
Travbanegatan 6, 213 77 Malmö
Tel: 040-671 27 50
info@klimatbyran.se

Alla varumärken som används eller hänvisas till är respektive ägares egendom.
FabricAir® är ett registrerat varumärke som tillhör FabricAir A/S i Danmark och/eller andra länder.

www.klimatbyran.se

Klimatbyrån AB förbehåller sig rätten till ändringar. (ed. 23-04)